SMA INTERFACE MATING DIMENSIONS

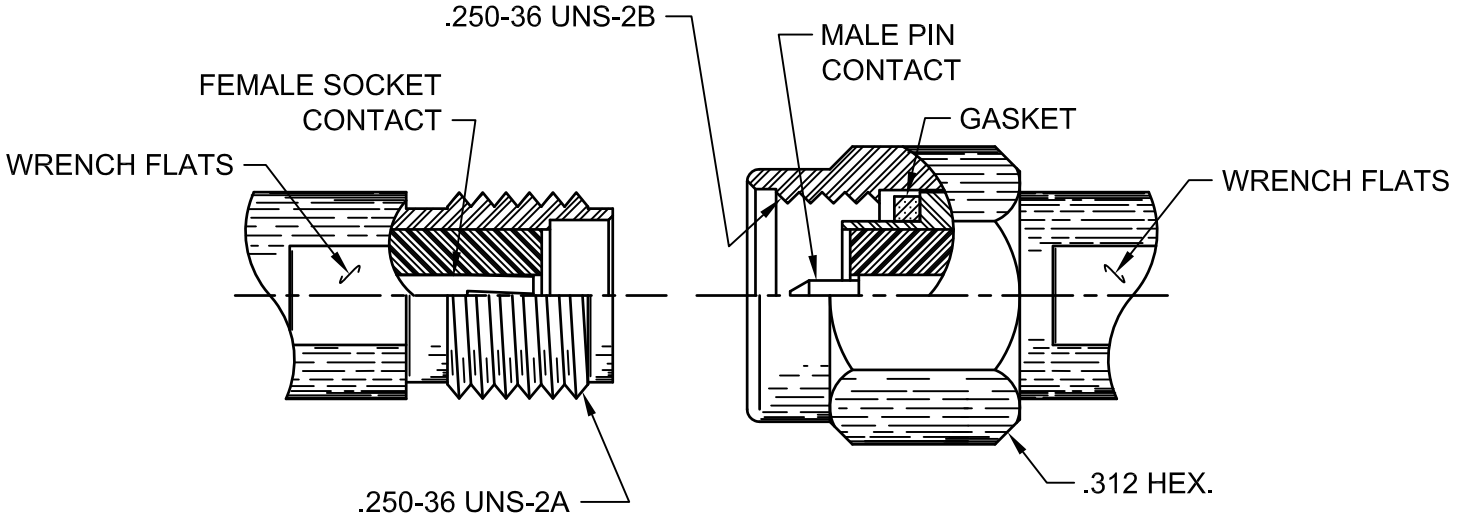

INTERFACE DIMENSIONS

FEMALE / JACK			
LTR.	MAX.	MIN.	mm
A	.0780	.0740	1.93
B	.0510	.0490	1.26
C	---	---	---
D	---	.1810	4.59
E	.2160	.2080	5.38

MALE / PLUG			
LTR.	MAX.	MIN.	mm
F	.1808	.1780	4.55
G	---	---	---
H	.0365	.0355	0.91
I	.1000	.0600	2.03
J	---	---	---

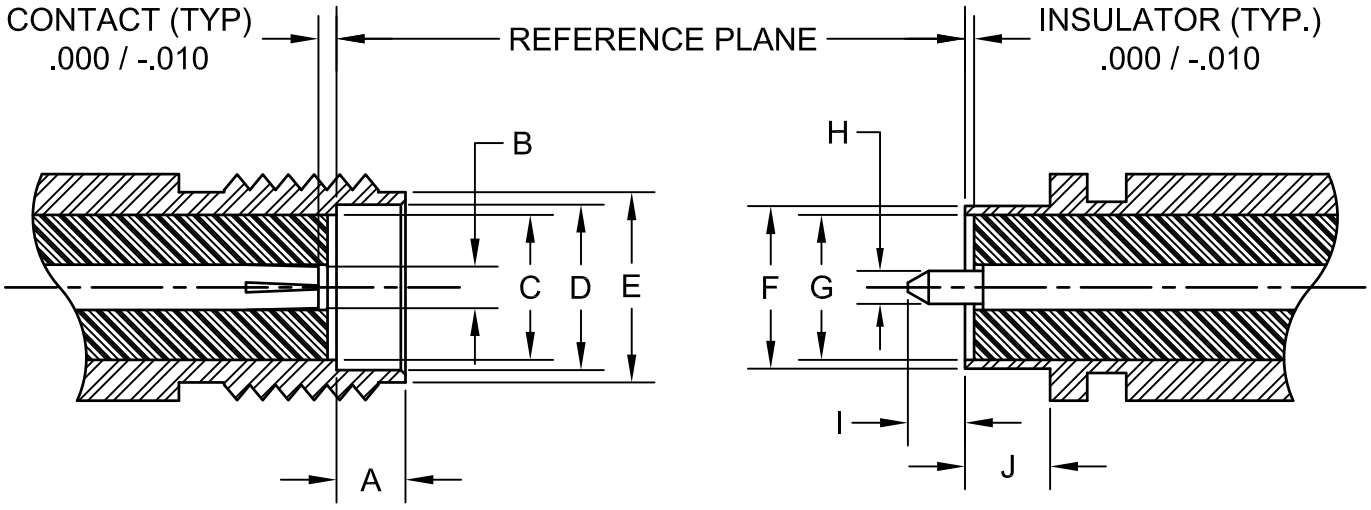

DWG NO.

SMA Series

TITLE:

SMA INTERFACE MATING DIMENSIONS (IAW MIL-STD-348)

SGMC MICROWAVE
www.sgmcmicrowave.com
Manufacturer of Precision Coaxial Connectors

"PROPRIETARY INFORMATION" THE INFORMATION WITHIN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PRIOR WRITTEN PERMISSION FROM (SGMC) SGMC MICROWAVE.

SCALE: NTS	CAGE CODE: 1UYM4
DRAWN: LRH II	APPR:
SHEET: 1 OF 1	SIZE: A

REVISIONS

LTR:	DESCRIPTION: (ECN#)	DATE:
--	DWG. RELEASED	02/04/02